



VEHICLE RECOVERY ELECTRIC WINCH INSTRUCTIONS



SAFETY PRECAUTIONS

Warning! Observe safety precautions for personal safety and the safety of others. Improper equipment operation may cause personal injury and equipment damage.

Read the following carefully before attempting to operate your winch and keep the instructions

1. Dress Properly:

- Don't wear loose clothing or jewelry. They can be caught in moving parts.
- Wear leather gloves when handling winch cable. Do not handle cable with bare hands broken wires can cause injuries.
- Non-skid footwear is recommended,
- Protective hair covering to contain long hair.

2. Keep a Safe Distance:

- Ensure that all persons stand well clear of winch cable and load during winch operation, 1.5 times the cable length recommended. If a cable pulls loose or breaks under load it can lash back and cause serious personal injury or death.
- Don't step over the cable.
- All visitors and onlookers should be kept away from the work area.
- Keep proper footing and balance at all times.

3. Don't Abuse the Cord:

- Never carry your winch by the cord or yank it to disconnect it from the receptacle.
- Keep cord from heat, oil and sharp edges.

4. Don't Overwork the winch:

- If the motor becomes uncomfortably hot to touch, stop and let it cool for a few minutes.
- Don't maintain power to the winch if the motor stalls.
- Don't exceed maximum line pull ratings shown in tables. Shock loads must not exceed these ratings.

5. Avoid Unintentional Starting:

- Winch clutch should be disengaged when not in use and fully engaged when in use.

6. Check Damaged Parts:

-Before using, you should check your winch carefully. Any part that is damaged should be properly repaired or replaced by an authorized service centre.

7. Repair Your Winch:

- When repairing, use only identical replacement parts or it may cause considerable danger for the user.

8. Respool the Cable:

-Leather gloves must be worn while respooling. To respool correctly, it is necessary to keep a slight load on the cable. Hold the cable with one hand and the remote control switch with the other. Start as far back and in the centre as you can. Walk up keeping load on the cable as the winch is powered in.

- Do not allow the cable to slop through your hand and do not approach the winch too closely.
- Turn off the winch and repeat the procedure until all the cable except 1m is in.
- Disconnect the remote control switch and finish spooling in cable by rotating the drum by hand with clutch disengaged.
- On hidden winches, spool in cable under power but keep hands clear.

Warning: The use of any other accessory or attachment other than those recommended in the instruction manual may present a risk of personal injury.

WINCH OPERATION WARNINGS

Read the following carefully before attempting to operate your winch and keep the instructions for future reference.

1. The uneven spooling of cable, while pulling a load, is not a problem, unless there is a cable pile up on one end of the drum. If this happens reverse the winch to relieve the load and move your anchor point to the other side of the vehicle.

After the job is done you can unspool and rewind for a neat lay of the cable.

2. Store the remote control switch inside your vehicle where it will not become damaged, inspect it before you plug it in.

3. When ready to begin spooling in, plug in remote control switch with clutch disengaged, do not engage clutch with motor running.

4. Never connect the hook back to the cable. This causes cable damage. Always use a sling or chain of suitable strength.

5. Observe your winch while winching, if possible while standing at a safe distance. Stop the winching process every meter or so to assure the cable is not pulling up in one corner. Jamming the cable can break your winch.

6. Do not attach tow hooks to winch mounting apparatus. They must be attached to vehicle frame.

7. The use of a snatch block will aid recovery operations by providing a doubling of the winch capacity and a halving of the winching speed, and the means to maintain a direct line pull to the centre of the fairlead. During stationary winching, the winch hook should be attached to the chassis of the vehicle.

8. Ensure rated "D" or bow shackles are used in conjunction with an approved tree trunk protector to provide a safe anchor point.

9. When extending winch cable, ensure that at least five wraps of cable remain on drum at all times. Failure to do this could result in the cable parting from the drum under load. Serious personal injury or property damage may result.

10. All winches are provided with a red cable marking to identify that 5 cable wraps remain on the Winch drum when this mark appears at the fairlead. No recovery should be attempted beyond this marking.

11. Since the greatest pulling power is achieved on the innermost layer of your winch, it is desirable to pull off as much line as you can for heavy pulls (you must leave at least 5 wraps minimum on the drum-red cable). If this is not practical use a snatch block and double line arrangement.

12. Draping a heavy blanket or similar object over the extended winch cable is recommended as it will dampen any back lash should a failure occur.

13. Neat, tight spooling avoids cable binding, which is caused when a load is applied and the cable is pinched between the others. If this happens, alternatively power the winch in and out. Do not attempt to work a bound cable under load, free by hand.

14. Apply blocks to wheels when vehicles are on an incline.

15. Battery:

-Be sure that the battery is in good condition. Avoid contact with battery acid or other contaminants.

-Always wear eye protection when working around a battery.

-Have the engine running when using the winch, to avoid flattening the battery.

16. Winch Cable:

- Be sure that the cable is in good condition and is attached properly.

- Do not use the winch if cable is frayed.

- Do not move the vehicle to pull a load.

- The life of the cable is directly related to the use and care it receives. Following its first and subsequent uses, a cable must be wound on to the drum under a load of at least 500lbs (230kg) or the outer wraps will draw into the inner

wraps and severely damage the cable during winching. The first winch use should be a familiarization run while in a relaxed, non-recovery situation. Spool out the cable until the red cable appears (about five wraps on the drum), then rewind the cable on to the drum under a load of 500lbs (230kg) or more. This will slightly tension and stretch the new cable and create a tight cable wrap around the drum. Failure to do so may result in cable damage and reduced cable life.

- When the cable is replaced, be sure to apply Lactate, or an equal compound, to the cable clamp thread. Tighten the clamp screw properly but do not over tighten. The lactate will prevent loosening of the screw.

Lactate 7471 Primer and 222 Thread locker are recommended.

17. Do not attempt to exceed the pulling limits of this winch.

18. DO NOT drive your vehicle to assist the winch in any way . Vehicle movement in combination with winch operation may overload the cable, the winch itself or cause damaging shock loads.

19. Shock loads when winching are dangerous! A shock load occurs when an increased force is suddenly applied to the cable. A vehicle rolling back on a slack cable may induce a damaging shock load.

20. The winches shown in this manual are solely for vehicle and boat mounted, non-industrial applications.


21. Do not use winch in hoisting applications due to required hoist safety factors and features.

22. Do not use the winch to lift, support or otherwise transport people.

INSTALLATION

MOUNTING YOUR WINCH

1. a) The winch is to be mounted into a suitable steel mounting frame using the 4 point foot mounting system in either a horizontal or vertical plane.
- b) It's very important that the winch be mounted on a flat surface so that the three sections (motor, cable drum and gear housing) are properly aligned.
- c) Before commencing installation ensure the mounting facility being used is capable of withstanding the winches rated capacity.
- d) The fitment of winches and/or a frontal protection system may affect the triggering of SRS air bags. Check that the mounting system has been tested and approved for winch fitment in the airbag equipped vehicle.
2. Winch mounting frames and /or Frontal Protection Systems are suggested to suit most popular vehicles. Winch frames are packaged with detailed fitting instructions.
3. Should you wish to manufacture your own mounting plate the dimensions below will assist. A steel mount plate 6mm thick is recommended. Fasteners should be steel high tensile grade 5 or better. A poorly designed mount may void warranty.
4. The winch should be secured to the mounting with 3/8"UNC x 1-1/4"stainless steel bolts and spring washers provided.
5. The fairlead is to be mounted so as to guide the cable onto the drum evenly.

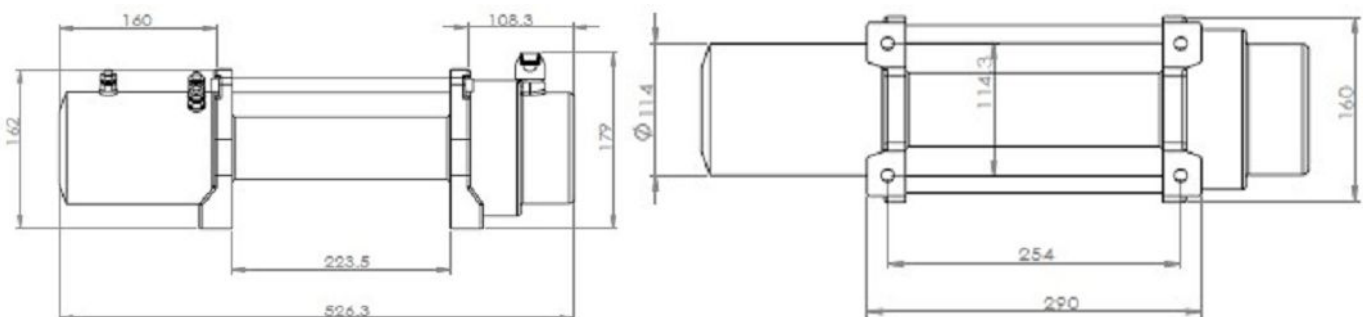

LUBRICATION INSTALLATION

All moving parts in the winch are permanently lubricated with high temperature lithium grease at the time of assembly. Under normal conditions factory lubrication will suffice. Lubricate cable periodically using light penetrating oil. Inspect for broken strands and replace if necessary. If the cable becomes worn or damaged it must be replaced.

CABLE INSTALLATION


Unwind the new cable by rolling it along the ground, to prevent kinking. Removed old cable and observe the manner in which it is attached to the drum flange.

ELECTRICAL CONNECTION

For normal self -recovery work, your existing electrical system is adequate. A fully charged battery and proper connections are essential. Run the vehicle engine during winching operations to keep battery charged..

Pay close attention to proper electrical cable connection as follows(refer to Diagram1)

1. Short red cable (B') connecting to the red terminal (B) of the motor.
2. Short black cable with yellow jacket (C') connecting to the yellow terminal (C) of the motor.
3. Short black cable with black jacket (D') connecting to the black terminal (D) of the motor.
4. Thin black cable(a') connecting to bottom terminal (A) of the motor.
5. Long black cable (1.8m), one terminal (A') connecting to the bottom terminal (A) of the motor, and the other terminal negative (-) connecting to negative (-) terminal of battery.
6. Long red cable positive (+) connecting to positive (+) terminal of battery.

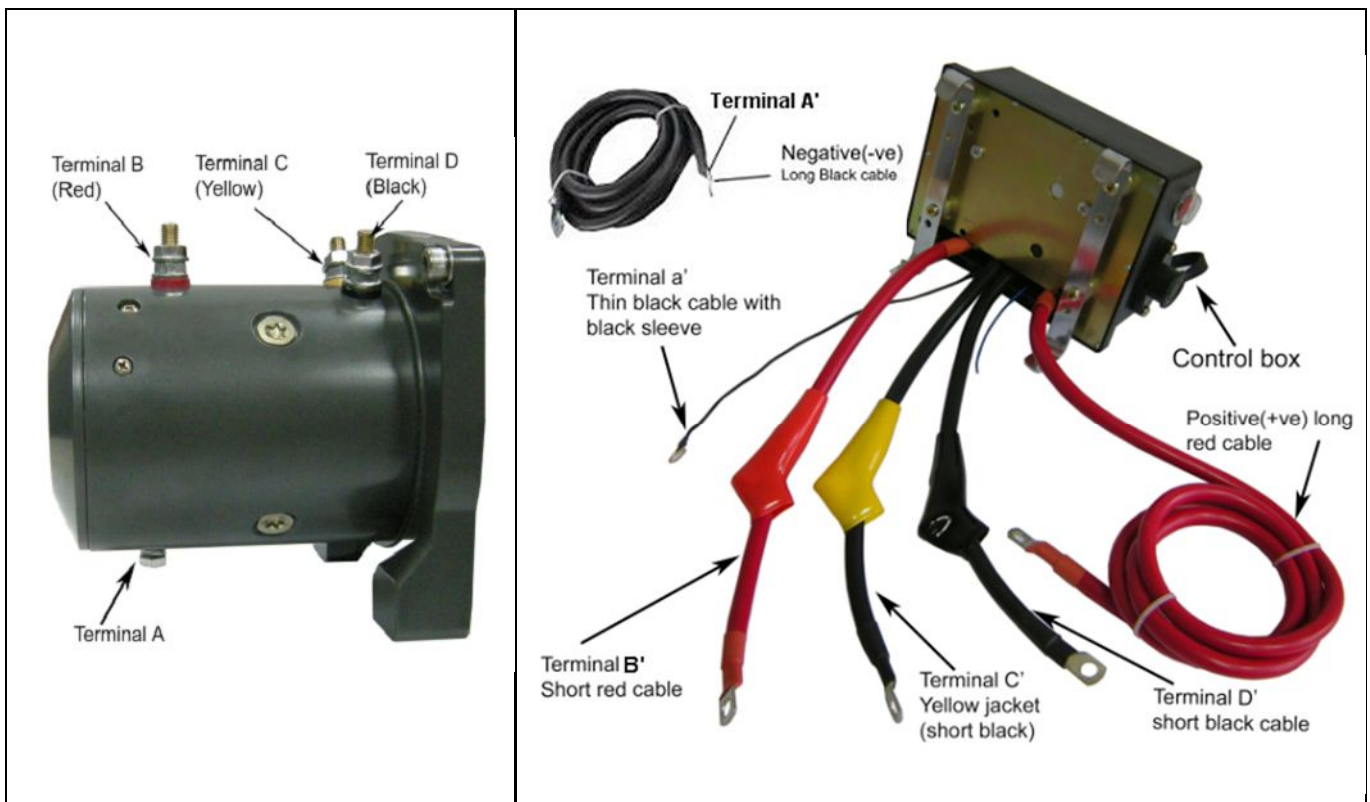

NOTE:

1. Your battery must be kept in good condition.
2. Be sure battery cables are not drawn taught across any surfaces, which could possibly damage them.
3. Corrosion on electrical connections will reduce performance or may cause a short.
4. Clean all connections especially in remote control switch and receptacle.
5. In salty environments use a silicone sealer to protect from corrosion.

WINCH OPERATION

SUGGESTION:

The best way to get acquainted with how your winch operates is to make a few test runs before you actually need to use it. Plan your test in advance. Remember you can hear your winch as well as you can see it operate. Get to recognize the sound of a light steady pull, a heavy pull, and sounds caused by load jerking or shifting. Soon you will gain confidence in operating your winch and its use will become second nature to you.

OPERATING:

1. Ensure the vehicle is secure by applying the parking brake or chocking the wheels.

2. Pull out the winch cable the desired length and connect to an anchor point.

The winch clutch allows rapid uncoiling of the cable for hooking onto the load or anchor point. The shifter tab located on the gear housing of the winch operates the clutch as follows:

- a) To disengage the clutch, move the clutch shifter tab to the "FREESPOOL" position. Cable could be free spooled off the drum.
- b) To engage the clutch, move the clutch shifter tab into the "ENGAGED" position. The winch is now ready for pulling.



3. Recheck all cable rigging before proceeding .

4. Plug in the winch hand control. It is recommended that the winching operation takes place from the driver's position to ensure safe operation.

5. To commence winching operation, start vehicle engine, select neutral in transmission, maintain engine speed at idle.

6. Operate the hand control or the wireless remote control until the vehicle has been retrieved. Regularly check the winch to ensure cable is winding onto the drum evenly.

Note:

1. Never winch with your vehicle in gear or in park, which would damage your vehicle's transmission.
2. Never wrap the cable around the object and hook onto the cable itself. This can cause damage to the object being pulled, and kink or fray the cable.
3. Keep hands, clothing, hair and jewelry clear of the drum area and cable when winching.
4. Never use the winch if the cable is frayed, kinked or damaged.
5. Never allow anyone to stand near the cable or in line with the cable behind the winch while it is under power. If the cable should slip or brake, it can suddenly whip back towards the winch, causing a hazard for anyone in the area. Always stand well to the side while winding.
6. Don't leave the switch plugged in when winch is not in use.

CHECK THE WINCH CAREFULLY AND THOROUGHLY BEFORE OPERATING!

MAINTENANCE

It is highly recommended that the winch be used regularly (once a month). Simply power the cable out 15m, free spool 5m and then power back in. This will keep all components in good working condition so that the winch can be relied on when needed. Contact your authorized outlet for technical assistance and repairs.

SPARE PARTS:

A comprehensive range of spare parts is available.
Please kindly contact the distributor or the local retailer.

WINCHING CAPACITY


1. Winch capacity depends on the winch that you purchase.
2. Pulling capacity is reduced as the incline increases.
3. Winch is not intended as a load securing device.

NOTE:

The safety precautions and instructions discussed in this manual can't cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors, which cannot be built into this product, but must be applied by the operator.

WINCH PARTS LIST

| Item Number | Description | Qty |
|-------------|-------------------------------------|-----|
| 1 | Screw Mx25 | 4 |
| 2 | Spring Washer | 4 |
| 3 | Motor | 1 |
| 4 | Braking assembly | 1 |
| 5 | Bearing bush | 2 |
| 6 | Sealing washer | 2 |
| 7 | Drum assembly | 1 |
| 8 | cable | 1 |
| 9 | Tie Bar | 2 |
| 10 | Control box assembly | 1 |
| 11 | Transmission shaft | 1 |
| 12 | Screw M4x16 | 10 |
| 13 | Spring washer | 10 |
| 14 | Gear Box bracket | 1 |
| 15 | Sealing washer1 | 1 |
| 16 | 3 st Planetary gear assy | 1 |
| 17 | Inner gear | 1 |
| 18 | 2 st Planetary gear assy | 1 |
| 19 | Inner gear | 1 |
| 20 | 1 st Planetary gear assy | 1 |
| 21 | Center gear | 1 |
| 22 | Bushing | 1 |
| 23 | Gear box | 1 |
| 24 | O-ring | 1 |
| 25 | Clutch shaft | 1 |
| 26 | Spring | 1 |
| 27 | Clutch Bush | 1 |
| 28 | Clutch handle | 1 |
| 29 | Screw | 1 |
| 30 | Hook | 1 |
| 31 | Black Battery negative(-) cord | 1 |
| 32 | Wireless remote transmitter | 1 |
| 33 | Fairlead | 1 |
| 34 | Control switch assembly | 1 |

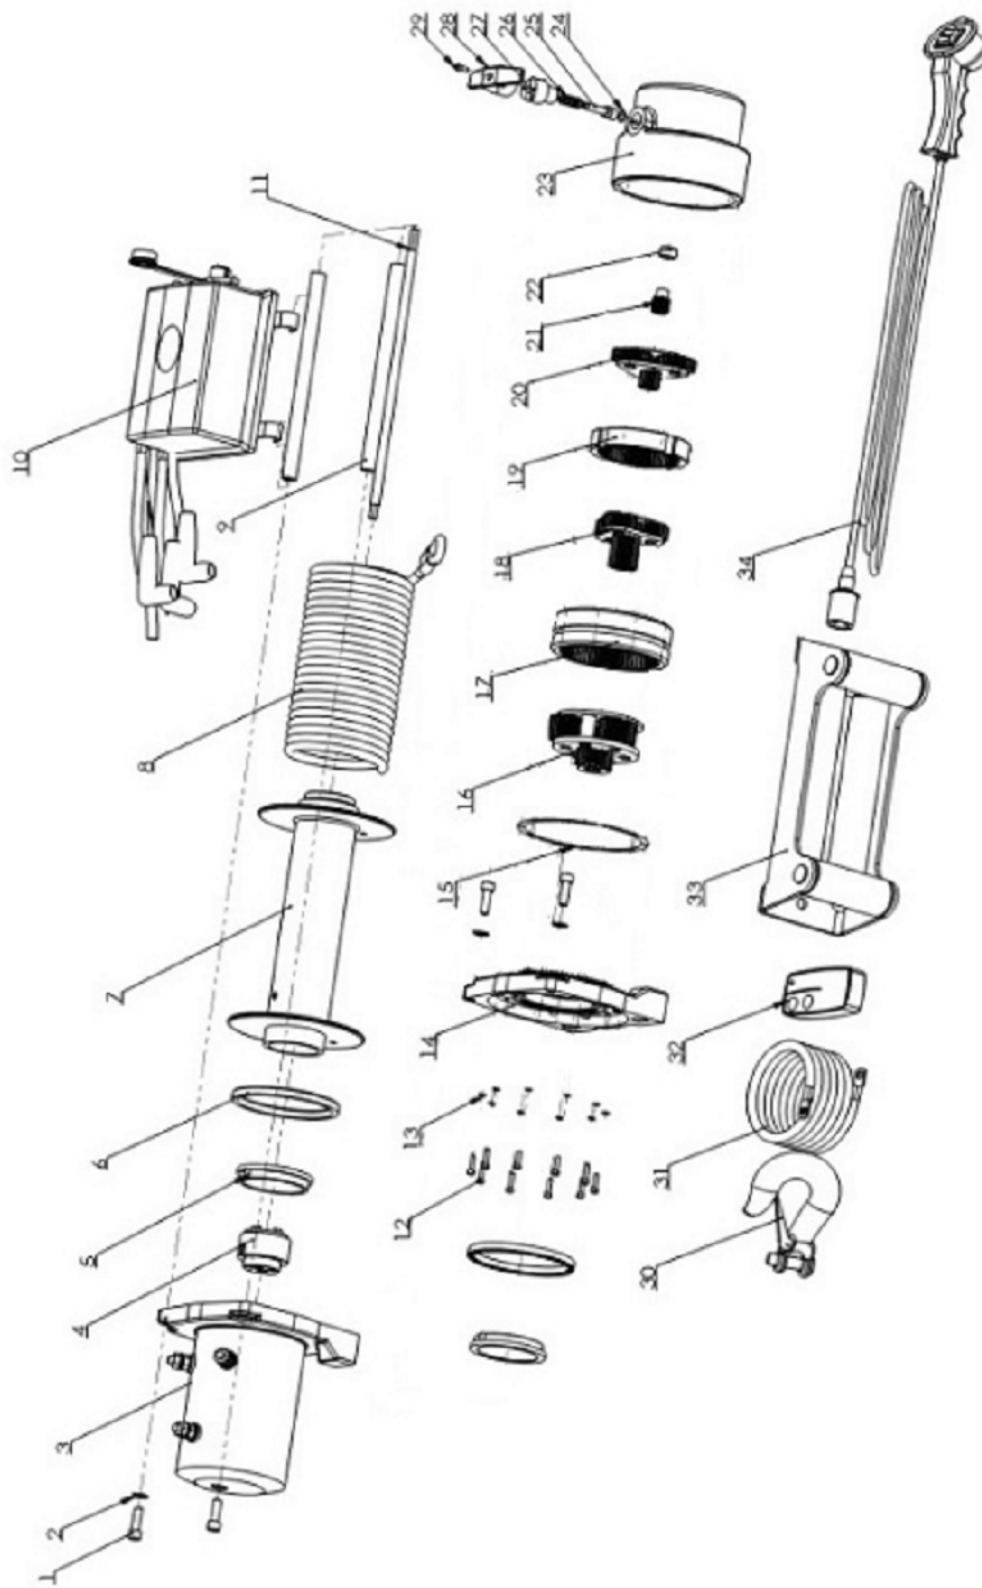

FEATURES AND SPECIFICATIONS

6000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 6000lb(3310kg) |
| Motor | 4.5hp/3.3kw,series wound |
| Main body | Sealed |
| Control | Remote switch,12ft (3.7m) lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | automatic braking action in the drum |
| Cable | 20m of 7.2mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 24.5kgs G.W 26.5kgs |
| Overall dimensions | (L*W*H) 415.3x160x179mm |
| Mounting Bolt Pattern | 6.5" x 4.5" (166.5x114.3mm) |

6000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 |
|---------------|--------|------------|------|------|------|
| | kgs | | 909 | 1814 | 3310 |
| Line Speed | ft/min | 27.8 | 14.6 | 11.0 | 8.65 |
| | m/min | 8.0 | 5.1 | 3.05 | 2.71 |
| Motor Current | amps | 80 | 149 | 195 | 220 |

6000LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 |
|------------------------------|-----|------|------|------|
| Rated line pull per layer | Lbs | 6000 | 4280 | 3320 |
| | Kgs | 3310 | 1941 | 1495 |
| Cumulative Cable capacity | Ft | 24.6 | 52.5 | 65.6 |
| | M | 7.5 | 16 | 20 |

8000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 8000lb(3629kg) |
| Motor | 5.5hp/4.0kw,series wound |
| Main body | Sealed |
| Control | Remote switch,12ft (3.7m) lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | automatic braking action in the drum |
| Cable | 28m of 8.1mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 33kgs G.W 35kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

8000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| | | | | | | |
|---------------|--------|------------|-------|-------|-------|------|
| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 |
| | kgs | | 909 | 1814 | 2721 | 3629 |
| Line Speed | ft/min | 25 | 17.91 | 12.30 | 10.33 | 8.04 |
| | m/min | 9.45 | 5.46 | 3.75 | 3.15 | 2.45 |
| Motor Current | amps | 60 | 113 | 184 | 228 | 296 |

8000LBS LINE PULL AND CABLE CAPACITY

| | | | | | |
|------------------------------|-----|------|------|------|------|
| Layer of cable | | 1 | 2 | 3 | 4 |
| Rated line pull per layer | Lbs | 8000 | 6510 | 5500 | 4750 |
| | Kgs | 3629 | 2967 | 2495 | 2167 |
| Cumulative | Ft | 23.3 | 47 | 80 | 92 |
| Cable capacity | M | 7.1 | 14.5 | 24 | 28 |

8500LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 8500lb(3856kg) |
| Motor | 5.6 hp/4.1kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Cable | 28m of 8.1mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 34kgs G.W 36kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

8500LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8500 |
|---------------|--------|------------|-------|-------|-------|------|
| | kgs | | 909 | 1814 | 2721 | 3856 |
| Line Speed | ft/min | 25 | 17.91 | 12.30 | 10.33 | 8.54 |
| | m/min | 9.45 | 5.46 | 3.75 | 3.15 | 2.05 |
| Motor Current | amps | 60 | 113 | 184 | 228 | 301 |

8500LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|------|------|------|------|
| Rated line pull per layer | Lbs | 8500 | 6620 | 5630 | 4850 |
| | Kgs | 3856 | 2980 | 2534 | 2183 |
| Cumulative Cable capacity | Ft | 23.3 | 47 | 80 | 92 |
| | M | 7.1 | 14.5 | 24 | 28 |

9500LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 9500lb(4309kg) |
| Motor | 6.0 hp/4.5kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Cable | 28m of 8.3mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 35kgs G.W 37kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

9500LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 9500 |
|---------------|--------|------------|-------|-------|-------|------|------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4309 |
| Line Speed | ft/min | 31 | 17.91 | 12.30 | 10.33 | 8.04 | 6.59 |
| | m/min | 9.45 | 5.46 | 3.75 | 3.15 | 2.45 | 2.01 |
| Motor Current | amps | 60 | 113 | 184 | 228 | 296 | 350 |

9500LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|------|-------|------|------|
| Rated line pull per layer | Lbs | 9500 | 7120 | 6670 | 5720 |
| | Kgs | 4309 | 3230 | 3025 | 2595 |
| Cumulative Cable capacity | Ft | 22.6 | 33.46 | 72.0 | 92 |
| | M | 6.9 | 10.2 | 22 | 28 |

10000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 10000lb(4536kg) |
| Motor | 6.0 hp/4.5kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Cable | 28m of 9.1mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 36kgs G.W 38kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

10000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 10000 |
|---------------|--------|------------|-------|-------|------|------|-------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4536 |
| Line Speed | ft/min | 35.50 | 20.60 | 15.19 | 12 | 9.84 | 8.07 |
| | m/min | 10.82 | 6.28 | 4.63 | 3.66 | 3.0 | 2.46 |
| Motor Current | amps | 67 | 131 | 198 | 261 | 320 | 365 |

10000LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|-------|------|------|------|
| Rated line pull per layer | Lbs | 10000 | 8000 | 6670 | 5720 |
| | Kgs | 4536 | 3629 | 3025 | 2595 |
| Cumulative Cable capacity | Ft | 21.3 | 40 | 72.0 | 92 |
| | M | 6.5 | 12 | 22 | 28 |

12000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 12000LB(5443kg) |
| Motor | 6.6 hp/4.85kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Cable | 28m of 9.1mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 36kgs G.W 38kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

12000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 10000 | 12000 |
|---------------|--------|------------|-------|-------|------|------|-------|-------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4536 | 5443 |
| Line Speed | ft/min | 34.40 | 20.60 | 15.19 | 12 | 9.84 | 8.07 | 7.15 |
| | m/min | 10.82 | 6.28 | 4.63 | 3.66 | 3.0 | 2.46 | 2.18 |
| Motor Current | amps | 67 | 131 | 198 | 261 | 320 | 350 | 390 |

12000LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|-------|------|------|------|
| Rated line pull per layer | Lbs | 12000 | 9210 | 8030 | 6894 |
| | Kgs | 5443 | 4178 | 3642 | 3123 |
| Cumulative Cable capacity | Ft | 21.3 | 40 | 72.0 | 92 |
| | M | 6.5 | 12 | 22 | 28 |

12500LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 12500lb(5670kg) |
| Motor | 6.6 hp/4.85kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Two way braking action in the drum |
| Cable | 26m of 9.3mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 37kgs G.W 39kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

12500LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 10000 | 12500 |
|---------------|--------|------------|-------|-------|------|------|-------|-------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4536 | 5670 |
| Line Speed | ft/min | 35.50 | 20.60 | 15.19 | 12 | 9.84 | 8.07 | 7.15 |
| | m/min | 10.82 | 6.28 | 4.63 | 3.66 | 3.0 | 2.46 | 2.18 |
| Motor Current | amps | 67 | 131 | 198 | 261 | 320 | 375 | 405 |

12500LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|-------|------|------|------|
| Rated line pull per layer | Lbs | 12500 | 9210 | 8030 | 6894 |
| | Kgs | 5670 | 4178 | 3642 | 3123 |
| Cumulative Cable capacity | Ft | 20.3 | 42.6 | 72.0 | 85.5 |
| | M | 6.0 | 13.2 | 22.1 | 26 |

13000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 13000lb(5897kg) |
| Motor | 6.6 hp/4.85kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Two way braking action in the drum |
| Cable | 26m of 9.5mm diameter |
| Fairlead | 4-way roller fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 37kgs G.W 39kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

13000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 4000 | 6000 | 8000 | 9500 | 11000 | 13000 |
|---------------|--------|------------|-------|------|------|------|-------|-------|
| | kgs | | 1814 | 2721 | 3629 | 4082 | 4970 | 5897 |
| Line Speed | ft/min | 35.50 | 15.19 | 12 | 9.84 | 6.59 | 8.07 | 7.15 |
| | m/min | 10.82 | 4.63 | 3.66 | 3.0 | 2.01 | 2.46 | 2.18 |
| Motor Current | amps | 67 | 198 | 261 | 320 | 350 | 370 | 405 |

13000LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 |
|------------------------------|-----|-------|------|------|------|
| Rated line pull per layer | Lbs | 13000 | 9210 | 8030 | 6894 |
| | Kgs | 5897 | 4178 | 3642 | 3123 |
| Cumulative Cable capacity | Ft | 20.3 | 42.6 | 72.0 | 85.5 |
| | M | 6.0 | 13.2 | 22.1 | 26 |

9000LBS Heavy Duty Electric Winch

| | |
|------------------------|---|
| Single line rated pull | 9000LB(4082kg) |
| Motor | 6.0 hp/4.5kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Plasma rope | 28m of 9.0mm diameter |
| Fairlead | Anodized aluminum fairlead |
| Battery | Recommended:650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 25kgs G.W 27kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

9000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)

| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 9000 |
|---------------|--------|------------|-------|-------|-------|------|------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4082 |
| Line Speed | ft/min | 31 | 17.91 | 12.30 | 10.33 | 8.04 | 6.59 |
| | m/min | 9.45 | 5.46 | 3.75 | 3.15 | 2.45 | 2.01 |
| Motor Current | amps | 60 | 113 | 184 | 228 | 296 | 350 |

9000LBS LINE PULL AND CABLE CAPACITY

| Layer of cable | | 1 | 2 | 3 | 4 | 5 |
|------------------------------|-----|-------|-------|-------|-------|------|
| Rated line pull per layer | Lbs | 9000 | 7120 | 5860 | 5020 | 4200 |
| | Kgs | 4082 | 3230 | 2658 | 2277 | 1905 |
| Cumulative Cable capacity | Ft | 16.08 | 33.46 | 52.82 | 77.10 | 92 |
| | M | 4.9 | 10.2 | 16.1 | 23.5 | 28 |

12000LBS Heavy Duty Electric Winch

| | |
|------------------------|--|
| Single line rated pull | 12000LB(5443kg) |
| Motor | 6.6 hp/4.85kw.Series Wound |
| Main body | Sealed |
| Control | Remote switch,12ft(3.7m)lead |
| Remote Control | Included |
| Gear train | 3 Stage Planetary |
| Gear reduction ratio | 191:1 |
| Clutch | Keyway Cam |
| Braking Action | Automatic braking action in the drum |
| Plasma rope | 28m of 10.0mm diameter |
| Fairlead | Anodized aluminum fairlead |
| Battery | Recommended: 650CCA minimum for winching |
| Battery Leads | 2 gauge,72"(1.83mm) |
| Finish | Powder coating |
| Weight | N.W. 26kgs G.W 28kgs |
| Overall dimensions | (L*W*H) 526.3x160x179mm |
| Mounting Bolt Pattern | 10" x 4.5" (254x114.3mm) |

12000LBS LINE SPEED AND AMP DRAW (FIRST LAYER)



| Line Pull | Lbs | NO LOAD | 2000 | 4000 | 6000 | 8000 | 10000 | 12000 |
|---------------|--------|------------|-------|-------|------|------|-------|-------|
| | kgs | | 909 | 1814 | 2721 | 3629 | 4536 | 5443 |
| Line Speed | ft/min | 35.50 | 20.60 | 15.19 | 12 | 9.84 | 8.07 | 7.15 |
| | m/min | 10.82 | 6.28 | 4.63 | 3.66 | 3.0 | 2.46 | 2.18 |
| Motor Current | amps | 67 | 131 | 198 | 261 | 320 | 350 | 390 |

12000LBS LINE PULL AND CABLE CAPACITY


| Layer of cable | | 1 | 2 | 3 | 4 | 5 |
|------------------------------|-----|-------|-------|-------|-------|------|
| Rated line pull per layer | Lbs | 12000 | 9620 | 8450 | 7670 | 6850 |
| | Kgs | 5443 | 4364 | 3833 | 3479 | 3107 |
| Cumulative Cable capacity | Ft | 14.76 | 30.18 | 48.23 | 70.54 | 92 |
| | M | 4.5 | 9.2 | 14.7 | 21.5 | 28 |

Solenoid and Drawing (Optional parts)

Please note this solenoid is optional, it depends on the winch that you purchase.

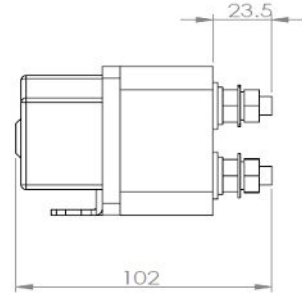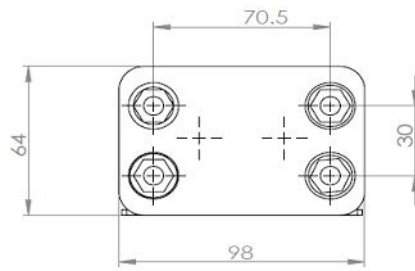

Electric Diagram of electric winch (series wound motor)

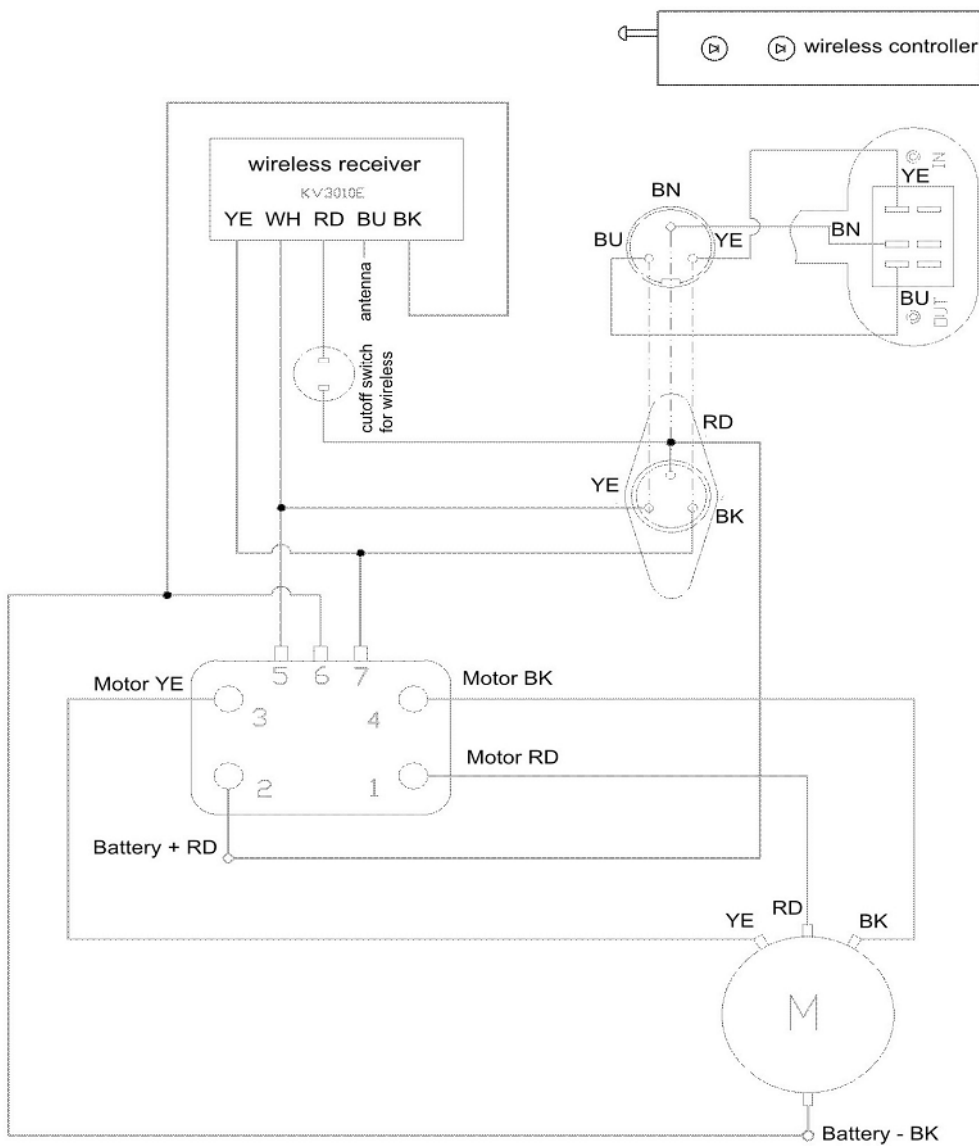

Note for cord color:
 YE: yellow WH: white
 RD: red BU: blue
 BK: black BN: brown

Cut Off switch (Optional parts)



Please note cut off switch is optional, it depends on the winch that you purchase.

1. The cut off switch is for when the winch is not in use.
2. Failure to disconnect the power to the winch could result in the following problems.
 - A. If the winch is not periodically maintained the wiring could become loosened and cause difficulties.
 - B. When in use it is normal for the motor to generate some heat. If it has not been used for some time check contacts and terminals for corrosion which will interfere with the current flow.
 - C. When the winch has been in a moist environment, or stored for winter contacts may have become oxidized causing problems.
 - D. Do not operate the winch under salty, chemical and gaseous conditions for any length of time or the electrical parts may be affected.
3. When you are about to use the winch make sure the control switches are in the off position before connecting the cut off switch or cable.

The function of the cut off switch is to

- A. To prevent drainage of the battery.
- B. When not in use there will be no accidental operation of the winch.
- C. It can be used as an emergency cut off.

Note:

1. Do not use the cut off switch as a control switch.
2. When using the winch make sure the cable is firmly connected.
3. When not in use make sure the power is disconnected.