

7.0 HP Petrol Generator

213620

INSTRUCTION MANUAL

www.monstershop.co.uk



SPECIFICATION

PRODUCT DESCRIPTION

The 7HP Petrol Generator is a robust and reliable power solution, ideal for both home and job site use. Featuring a digital display, it provides easy monitoring of voltage, frequency, and runtime to ensure optimal performance. This generator includes a parts kit with essential tools for basic maintenance. Designed for portability, it comes equipped with sturdy wheels and handles, making it easy to transport and manoeuvre. Combining convenience, durability, and efficiency, this generator is designed to meet all your power needs.

PRODUCT SPECIFICS

DIMENSIONS:	60.5 x 44 x 44.5cm
RATED OUTPUT:	2.6Kw
MAX OUTPUT:	3.0Kw
WIRING:	Copper Wound
FREQUENCY:	50Hz
DC OUTPUT:	12V/8.3A
VOLTAGE:	230V
IGNITION:	Key Start
STARTING METHOD:	Electric
DISPLACEMENT:	212cm ³
NOISE (7M):	68-72
FUEL TANK CAPACITY:	12L
OIL CAPACITY:	0.6L
NET WEIGHT:	43kg

ITEM CONTENTS


- 1x Petrol Generator
- 1x Fuel Funnel
- 1x Tool Kit

SPECIFICATION

CONTROL PANEL

- A Power Indicator
- B DC Output
- C Voltmeter
- D AC Output

- E Circuit Breakers
- F Starter Switch
- G Terminal Post

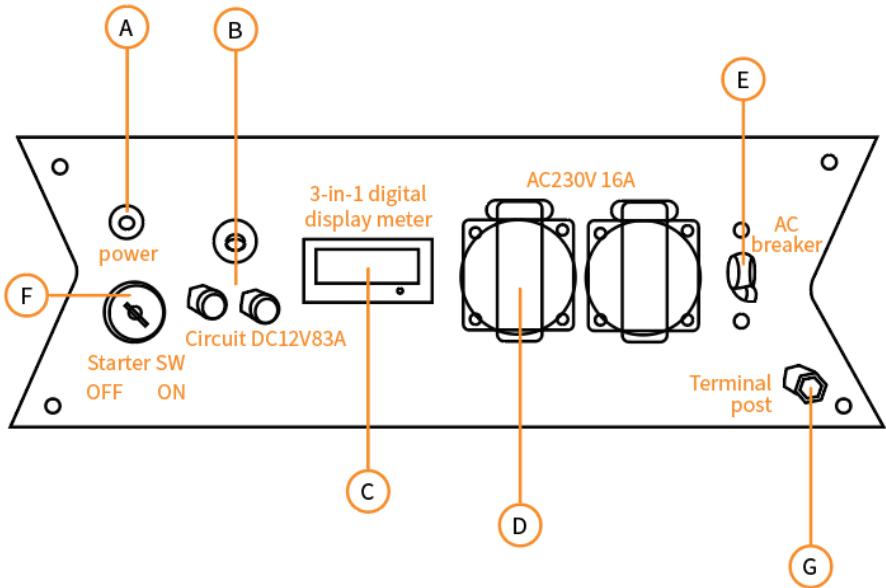

Monster Group UK Limited's liability will be limited to the commercial value of the product only.

SAFETY ADVICE

SAFE WORKING PRACTICE



WARNING
HIGH VOLTAGE ELECTRIC SHOCK HAZARD



Please read through the Safe Working Practice to ensure prevention of injury or damage to the device.

- Do not use this product for anything other than its intended purposes.
- Ensure you have read and fully understood the instruction manual and safety advice before using this product.
- Do not touch the output terminals during operation.
- Do not operate in wet conditions.
- Do not operate with wet hands.
- Check all power cables for damage prior to operation. If any damage is identified, do not use the cable.
- Keep cables away from sources of heat, sharp objects, or moving parts.
- Only connect equipment to the generator that is appropriately rated for this generator.
- Always use cables that are capable of handling the voltage and loads produced by the generator.
- Always use Petrol to re-fuel the generator. Do not use Diesel, or any other type of fuel.
- Always use the generator on a flat level surface. If the generator is operated on an incline, then the engine lubrication will not operate correctly and could lead to serious damage to the generator.
- Always switch off the generator before re-fueling.
- Never re-fuel the generator while it is still hot.

SAFETY ADVICE

SAFE WORKING PRACTICE

- Avoid spillages when re-fueling. If spillages occur, then always clean up before operating the generator.
- Perform a visual check for any signs of leaks prior to operating the generator. If any leaks are found, do not use until repaired.
- Keep flammable liquids away from the generator when in use.
- Do not use close to any naked flames.
- Do not smoke whilst operating or re-fueling the generator.
- Always keep spare or unused fuel in an appropriate container designed for such use.
- Wear protective clothing whilst operating the generator.
- Some parts of the generator will get hot during operation, take care not to touch hot components
- Always keep children and animals away from the generator whilst in use.
- We recommend the use of ear protectors when operating the generator.
- The exhaust fumes contain carbon monoxide, which is highly toxic. Always operate the generator in an open, well-ventilated area. Never operate indoors.
- Always follow proper manual handling procedures when moving the generator.
- This generator contains moving parts so always ensure loose clothing or hair is tied back when operating the generator.
- Apart from daily maintenance and cleaning, all repairs are to be carried out by a qualified technician.
- Always ground the generator before use. Connect a length of heavy wire between the generators ground terminal and an external ground device or ground rod.
- Do not connect any equipment to the generator before you start it.

USER GUIDE

PREPARATION BEFORE FIRST USE



Generators should ALWAYS be earthed. Attach a suitable earth lead to a good earth - water pipe, ground spike etc, whenever you use this generator.

For safety purposes the generator is drained of Fuel and Oil by the factory prior to transport. You will need to add fuel and oil to the generator before using the generator for the first time.

NEW ENGINES

New engines need to break-in. The break in period for these engines is approx. 20 hours. Do not overload the generator during the break-in period, maximum load should be no more than 75% of maximum rated power. Change the oil after 6 hours running or 1 month. Then change the oil after 15 hours for a few times of operating. Thereafter the oil change is required every 100 hours or 3 months.

ADDING FUEL

Only use PETROL fuel. Place the generator on a level surface and unscrew the fuel tank cap. Fill with petrol only up to maximum level mark. Do not overfill the fuel tank.

ADDING OIL

Engine oil is the most important factor in determining engine life. The use of poor-quality oil or not changing the oil regularly can result in the excessive wear on the engine or even the engine seizing up. We recommend the use of SAE 10W.30 grade oil. Place the generator on a level surface. Unscrew oil inlet cap and fill with oil. You can check the oil level using the oil dipstick. Do not force or rotate the dipstick in the engine.

USER GUIDE

CHECKS BEFORE EVERY USE

Check the following before each use to ensure the generator is safe to use and to prolong the life of your generator.

LEAKS - Ensure there are no fuel or oil leaks. If you spot any leaks do not use the generator.

FUEL - Ensure you have enough fuel in the fuel tank.

OIL - Check the oil level is within the minimum and maximum markings. The generator has a low oil pressure alarm and engine cut-off. In the event of low oil-pressure the generator will automatically switch off to protect the engine from potential damage. In addition, we do recommend that you regularly check the oil level.

NUTS & BOLTS - Check for loose nuts or bolts and tighten if necessary.

STARTING THE GENERATOR

ELECTRIC STARTING

1. Turn the key to the 'ON' position.
2. Put the fuel lever to the 'ON' position.
3. Put the choke to the 'CLOSE' position.
4. Turn the key to the 'START' position until the engine starts, then release, and it will automatically spring back to the 'ON' position.
5. As the engine warms up, put the choke to the 'OPEN' position.

PLEASE NOTE: Excessive use of the starter motor will flatten the battery. Always leave the ignition key in the 'ON' position while the generator is running.

MANUAL (RECOIL) STARTING

1. Turn the key to the 'ON' position.
2. Put the fuel lever to the 'ON' position.
3. Put the choke to the 'CLOSE' position.
4. Pull the cord to start the engine.
5. As the engine warms up, put the choke to the 'OPEN' position.

USER GUIDE

OPERATING INSTRUCTIONS

1. Always warm up the engine without any load for approx. 3 minutes before attaching any loads.
2. Check that there no abnormal vibrations or sounds. Check if the engine is misfiring. Check the colour of the exhaust gas – is it too light or too dark? If you notice any of these occurring, then switch off the generator.

AC OPERATION

1. Increase the speed of the engine to maximum using the engine speed lever
2. Check the voltmeter. Once it points to 230V +/- 5% you can connect an appliance to the generator.
3. When connecting appliances to the generator, always connect the largest load first.
4. If overloading of the generator causes the AC circuit breaker to trip, reduce the load on the circuit.

NOTE: Do not start two connected appliances simultaneously. Start one at a time. If you have connected floodlights to the generator do not connect any other appliances.

DC OPERATION

The DC terminal is only to be used for charging 12V applications.

1. Always disconnect the negative cable (Ground cable) before connecting to the generator
2. Start the generator.
3. Connect the charging cable to the terminals and then to the generator.
4. Once the application is charged always disconnect the cables at the generator first.

NOTE: DO NOT reverse the charging cables as this will damage the generator. Batteries can produce explosive gases while recharging. Charge batteries in a well-ventilated area.

USER GUIDE

OPERATING INSTRUCTIONS

STOPPING THE GENERATOR

1. Reduce the speed of the engine using the engine speed lever to its lowest speed.
2. Allow the engine to run without any load for approx. 3 minutes
3. Set the engine speed lever to 'STOP' and the fuel lever to 'STOP'
4. Turn the ignition key to the 'off' position.

MAINTENANCE

Remove the spark plug lead before performing maintenance. If spark plug issues arise then remove and clean. If the problem still persists, replace the spark plug.

CHANGING THE OIL

It is recommended that you change the oil when the engine is still warm as this will allow you to drain all the oil from the engine.

Unscrew the oil filler cap. Remove the drain plug and drain the used oil. Replace the drain plug and refill with new oil. Take not to over fill with oil. Use the dipstick to check how much oil is in the engine. We recommend 10W 30 Grade non- or part-synthetic oil.

CHECKING AND CHANGING THE AIR FILTER

To check the air filter, unscrew the wing nut for the air filter cover and remove the cover. Remove the air filter element. Do not use detergent to wash the filter element. Clean with water and allow to completely dry before re-fitting to the engine. The air filter element should be replaced every 6 months. Do not operate the generator without the filter attached as this can damage the engine.

CHECKING THE BATTERY

Check the amount of electrolytic solution in the battery once a month. If the level of electrolytic solution is below the minimum level mark on the battery, then top up with distilled water.

CHANGING THE FUEL FILTER

First drain all the fuel from the fuel tank. Loosen the small screws on the fuel switch and remove the fuel filter from the port. Use petrol fuel to clean the filter. To replace the filter just reverse the step for removing the filter.

MAINTENANCE

MAINTENANCE SCHEDULE

<div style="text-align: center;">Interval</div> <div style="text-align: center;">Action</div>	Daily or Before Each Use	1st 6 Hours of Use	After 15 Hours of Use	Monthly	Quarterly	6 Monthly	Annual
Check Oil Level							
Check for Leaks							
Check and Tighten Engine Parts							
Change Oil							
Drain Fuel Tank							
Check Battery Fluid							
Check Air Filter							
Replace Air Filter							
Clean Fuel Filter							
Replace Fuel Filter							

TROUBLESHOOTING

RESOLUTION GUIDE

WHAT DO I DO IF THERE ARE MISSING PARTS FROM MY ORDER?

If there appears to be any part missing from your order, contact our friendly and helpful Customer Support Team within 7 days of receipt.

WHY IS THE GENERATOR NOT STARTING?

Check fuel level and re-fuel if required, Check battery is charged and has enough battery acid. If you are still unable to start the generator, contact the Customer Support Team.

WHY ARE MY APPLIANCES NOT GETTING ANY POWER FROM THE GENERATOR?

First check the voltmeter. It should show the voltage to be 230V +/- 10%. Check the load rating of the appliance to make sure it is not rated too high for the generator. If you have more than one appliance connected to the generator, then try un-connecting one of the appliances.

**FOR ALL OTHER ISSUES, PLEASE CONTACT OUR
CUSTOMER SUPPORT TEAM.**



SPÉCIFICATIONS

DESCRIPTION DU PRODUIT

DÉTAILS DU PRODUIT

LISTE DES PIÈCES

SPÉCIFICATIONS

CARACTÉRISTIQUES DU PRODUIT

La responsabilité de Monster Group UK Limited sera limitée à la valeur commerciale du produit.

CONSEILS DE SÉCURITÉ

 PRATIQUE DE TRAVAIL SÉCURITAIRE

MODE D'EMPLOI

INSTRUCTIONS DE MONTAGE

MODE D'EMPLOI

ENTRETIEN

DÉPANNAGE

GUIDE DE RÉOLUTION

QUE FAIRE S'IL MANQUE DES PIÈCES À MA COMMANDE?

S'il semble manquer des pièces à votre commande, contactez notre équipe du service client dans les 7 jours suivant la réception.

**POUR TOUT AUTRE PROBLÈME, VEUILLEZ
CONTACTER NOTRE ÉQUIPE DU SERVICE CLIENT.**



SPEZIFIKATIONEN

PRODUKTBESCHREIBUNG

PRODUKTSPEZIFIKA

TEILELISTE

SPEZIFIKATION

PRODUKTMERKMALE

Die Haftung von Monster Group UK Limited ist auf den Handelswert des Produkts beschränkt.

SICHERHEITSHINWEIS

 SICHERES ARBEITEN

BENUTZERLEITFADEN

MONTAGEANLEITUNGEN

BENUTZERLEITFADEN

WARTUNG

FEHLERBEHEBUNG

LÖSUNGSGUIDE

WAS MACHE ICH, WENN BEI MEINER BESTELLUNG TEILE FEHLEN?

Falls bei Ihrer Bestellung ein Teil zu fehlen scheint, wenden Sie sich bitte innerhalb von 7 Tagen nach Erhalt der Ware an unser freundliches und hilfsbereites Kundenservice-Team.

**FÜR ALLE ANDEREN FRAGEN WENDEN SIE SICH BITTE AN
UNSER KUNDENSERVICE-TEAM.**



ESPECIFICACIONES

DESCRIPCIÓN DEL PRODUCTO

ESPECIFICACIONES DEL PRODUCTO

LISTA DE PIEZAS

ESPECIFICACIONES

CARACTERÍSTICAS DEL PRODUCTO

La responsabilidad de Monster Group UK Limited estará limitada únicamente al valor comercial del producto.

CONSEJOS DE SEGURIDAD

PRÁCTICAS DE TRABAJO SEGURAS

GUÍA DEL USUARIO

INSTRUCCIONES DE ENSAMBLAJE

GUÍA DEL USUARIO

MANTENIMIENTO

SOLUCIÓN DE PROBLEMAS

GUÍA DE RESOLUCIÓN

¿QUÉ PUEDO HACER SI LE FALTAN PIEZAS A MI PEDIDO?

Si parece faltar alguna pieza en su pedido, por favor, comuníquese con nuestro amable y servicial Equipo de Atención al Cliente en los 7 días posteriores a la recepción de su pedido.

**PARA CUALQUIER OTRO PROBLEMA, POR FAVOR CONTACTE
CON NUESTRO EQUIPO DE ATENCIÓN AL CLIENTE**



SPECIFICHE

DESCRIZIONE DEL PRODOTTO

SPECIFICHE DEL PRODOTTO

LISTA COMPONENTI

SPECIFICHE

CARATTERISTICHE DEL PRODOTTO

La responsabilità di Monster Group UK Limited sarà limitata al solo valore commerciale del prodotto.

CONSIGLI PER LA SICUREZZA

 PRATICHE DI LAVORO SICURO

GUIDA UTENTE

ISTRUZIONI PER IL MONTAGGIO

GUÍA DEL USUARIO

MANTENIMIENTO

RISOLUZIONE DEI PROBLEMI

GUIDA ALLA RISOLUZIONE DEI PROBLEMI

COSA DEVO FARE SE NEL MIO ORDINE CI SONO DELLE PARTI MANCANTI?

Se sembra che all'interno del tuo ordine manchino delle parti, contatta il nostro gentile e disponibile team di assistenza clienti entro 7 giorni dalla ricezione del tuo ordine.

**PER QUALUNQUE ALTRO PROBLEMA, CONTATTA IL NOSTRO
TEAM DI ASSISTENZA CLIENTI.**



OMSCHRIJVING

PRODUCT OMSCHRIJVING

PRODUCTSPECIFICATIES

ONDERDELENLIJST

SPECIFICATIE

PRODUCT SPECIFICATIE

De aansprakelijkheid van Monster Group UK Limited is beperkt tot de commerciële waarde van het product.

VEILIGHEIDSADVIES

 VEILIG GEBRUIK

HANDLEIDING

MONTAGE-INSTRUCTIES

HANDLEIDING

ONDERHOUD

PROBLEEM OPLOSSEN

OPLOSSINGEN

WAT MOET IK DOEN ALS ER ONDERDELEN VAN MIJN BESTELLING ONTBREKEN?

Neem wanneer een onderdeel van je bestelling ontbreekt binnen 7 dagen na ontvangst contact op met onze vriendelijke en behulpzame klantenservice.

**NEEM VOOR ALLE ANDERE KWESTIES CONTACT
MET ONZE KLANTENSERVICE OP.**



SPECIFIKATION

PRODUKTBESKRIVNING

PRODUKTSPECIFIKATIONER

MEDFÖLJANDE DELAR

SPECIFIKATION

PRODUKTFUNKTIONER

SÄKERHETSÅD

 SÄKER ARBETSÖVNING

ANVÄNDARGUIDE

MONTERINGS INSTRUKTIONER

BRUKSANVISNING

SKÖTSEL

FELSÖKNING

LÖSNINGSGUIDE

VAD GÖR JAG OM DET SAKNAS DELAR FRÅN MIN BESTÄLLNING?

Om det verkar som om någon del saknas i din beställning, kontakta vårt vänliga och hjälpsamma kundsupportteam inom 7 dagar efter mottagandet.

**FÖR ALLA ANDRA FRÅGOR, VÄNLIGEN KONTAKTA VÅRT
KUNDSUPPORTTEAM.**

Monster Group (UK) is one of the UK's fastest growing online retailers. We supply a diverse range of products which offer exceptional value for money. We strive to provide the best possible customer experience with free UK delivery across all our products and a Monster Guarantee for 100% satisfaction.

For information regarding this device or other products from our Monster divisions please contact Sales.

SALES

TEL: 01347 878 888
EMAIL: hello@monstershop.co.uk

For queries about this device, warranty, returns or reporting faults please contact Support.

SUPPORT

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Pour plus d'informations concernant cet appareil ou d'autres produits de nos divisions de Monster veuillez utiliser les détails suivants ci-dessous.

DÉPARTEMENT COMMERCIAL

TEL: 01347 878 888
EMAIL: bonjour@monstershop.eu

Pour les interrogations concernant cet appareil, la garantie, les retours ou les défauts de déclaration veuillez utiliser les détails suivants ci-dessous.

DÉPARTEMENT DE SOUTIEN

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Para información sobre este dispositivo u otros productos de nuestras divisiones de Monster por favor use los siguientes detalles.

DEPARTAMENTO DE VENTAS

TEL: 01347 878 888
EMAIL: hola@monstershop.eu

Para consultas sobre este dispositivo, la garantía, devoluciones o denuncias de fallos por favor use los siguientes detalles.

DEPARTAMENTO DE SOPORTE

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Für Informationen bezüglich dieses Geräts oder anderer Produkte aus unserer Monster-Abteilung, benutzen sie die folgenden unten aufgeführten Angaben.

VERKAUFSABTEILUNG

TEL: 01347 878 888
EMAIL: hallo@monstershop.eu

Für Fragen über dieses Gerät, die Garantie, Rückgaben oder bei Störungen, benutzen sie die folgenden unten aufgeführten Angaben.

SUPPORT-ABTEILUNG

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Per informazioni riguardanti questo dispositivo o altri prodotti dalle categorie Monster utilizzare i dettagli sotto riportati.

DIPARTIMENTO VENDITE

TEL: 01347 878 888
EMAIL: ciao@monstershop.eu

Per domande riguardo dispositivo, garanzia, reso o per riferire di guasti, utilizzare i dettagli sotto riportati.

DIPARTIMENTO SUPPORTO

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Voor informatie over dit apparaat of andere producten van onze Monster-divisies kunt u contact opnemen met onze verkoop afdeling. Signifieer details.

VERKOOP

TEL: 01347 878 888
EMAIL: hello@monstershop.co.uk

Voor vragen over dit apparaat, garantie, retourzendingen of het melden van fouten kunt u contact opnemen met de klanten support details.

SUPPORT

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

Monster House, Alan Farnaby Way,
Sheriff Hutton Industrial Estate,
Sheriff Hutton, York, YO60 6PG
www.monstershop.co.uk



För information om denna enhet eller andra produkter från våra Monster-divisioner vänligen kontakta vårt hjälpsamma säljteam. Önska verköps afdeling. Signifieer detaljer.

SALES

TEL: 01347 878 888
EMAIL: hello@monstershop.co.uk

Kontakta vår kundsupport för frågor om denna enhet, garanti, retur eller felrapportering.

SUPPORT

TEL: 01347 878 887
EMAIL: help@monstershop.co.uk

 Try **Monster. Buy Monster. Be Monster.** 