


A StepAlong by Monstershop

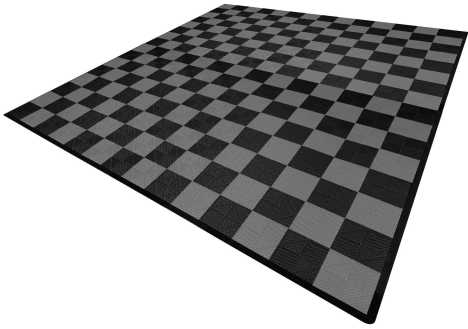

## Vented Garage Flooring Tiles

214534/214537/214538/214567/214568/214569/21457

### Unit Overview

Transform your garage with our Vented Garage Flooring Tiles, designed to provide durability, style, and practicality. Sold as a complete set for single or double garages, this flooring solution includes edges and corners for a seamless, finished look. The vented design ensures excellent airflow and drainage, keeping your space clean and dry. Ideal for transforming your garage into a professional workspace, showroom, or organised storage area.

### Specifications

- **Tile dimensions:** 400mm x 400mm x 18mm
- **Tile weight:** 480g
- **Edge dimensions:** 400mm x 65mm x 18mm
- **Edge weight:** 100g
- **Corner dimensions:** 65mm x 65mm x 18mm
- **Corner weight:** 12g
- **Weight Capacity:** 6-8 tonnes.
- **Tiles available in:** Black, Grey and Blue.
- **Material:** Polypropylene
- Suitable for both indoor and outdoor use.



## Safety Advice

- Ensure the garage floor is clean, level, and free of debris, oil, or chemicals before installation. Uneven surfaces may lead to instability or damage.
- Follow the provided instructions to connect the tiles, edges, and corners securely. Incorrect assembly can cause shifting or unsafe conditions.
- Install in areas with moderate temperature conditions. Prolonged exposure to heat above 140°F (60°C) can cause warping or cracks.
- Avoid installing near direct heat sources (heaters, furnaces, etc.) to prevent material degradation.
- Each tile supports a maximum static load of 3,306 pounds (1500 kg). Exceeding this limit may lead to cracks or permanent deformation. Distribute heavy loads evenly.
- Avoid parking vehicles with excessively hot tires on the tiles, as this may soften the plastic and cause deformation over time.
- Do not use the tiles to support jacks, ramps, or machinery that exceeds the stated weight limit or exerts uneven pressure. Always use protective mats if needed.
- Keep the tiles away from open flames, welding equipment, or any heat sources that may cause melting or fires.
- Do not run electrical wires beneath the tiles. Exposed wiring can create electrical hazards, including shock or fire risks.
- Clean with mild detergent and water. Avoid harsh chemicals or abrasive cleaners that can damage the surface.
- Periodically check the tiles for cracks, wear, or damage. Replace damaged tiles immediately. Ensure interlocks remain secure after exposure to heavy loads or extreme temperatures.
- Ensure proper drainage and ventilation to prevent water accumulation under the tiles, which can lead to mold or mildew. Dry the area fully before reinstallation if moisture is detected.



- This product is designed for garages and similar environments. Avoid using it in areas with constant foot traffic or outdoor settings, where the surface may become slippery when wet.
- Avoid dragging heavy or sharp objects across the tiles, as this can lead to scratches, cracks, or damage to the interlocking system.


## Steps (4)

### 1. Step 1


**Buckled** refers to a side with buckles prominent.

**Unbuckled** refers to a side without buckles.

- To connect the sides place the buckled side underneath the edge of the unbuckled side before firmly pressing down linking the different pieces.
- Clip the edges and corner together by attaching the buckled and unbuckled sides together.
- Clip the attached edges and corner to the Vented Garage Floor Tile by aligning the corresponding buckled and unbuckled sides together to join the pieces.

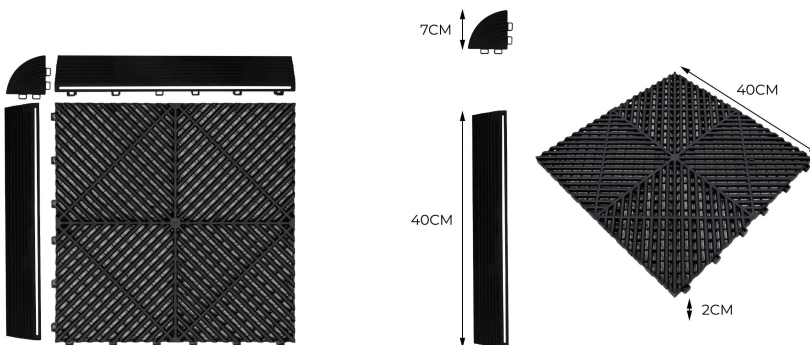

## 2. Step 2

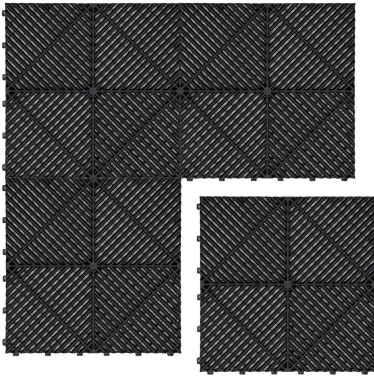

- To connect the sides place the buckled side underneath the edge of the unbuckled side before firmly pressing down linking the different pieces.
- Clip the Vented Garage Floor Tiles together by aligning the buckled and unbuckled sides together to join the pieces.
- Repeat this process until you achieved your desired size and design.

## 3. Maintenance

- Regular Cleaning: Sweep or vacuum debris and dirt to keep the surface clean.
- Deep Cleaning: Use a mild detergent with water and a mop or soft brush. Rinse thoroughly with water and let air dry.
- Spot Cleaning: For stubborn stains, use a non-abrasive cleaner and a soft scrub brush.
- Avoid Harsh Chemicals: Do not use solvents or bleach, as they may damage the tiles.
- Inspect Periodically: Check for any loose or damaged tiles and replace as needed to maintain - stability and appearance.

## 4. Troubleshooting

- **WHAT DO I DO IF THERE ARE MISSING PARTS FROM MY ORDER?**

If there appears to be any part missing from your order, contact our friendly and helpful Customer Support Team within 7 days of receipt.



- **FOR ALL OTHER ISSUES, PLEASE CONTACT OUR CUSTOMER SUPPORT TEAM.**

