13x2cm



Single Firing: Push the button to the left. Apply pressure to the Safety Contact Pin against the workpiece and squeeze the Trigger. Release the Trigger and Safety Contact Pin after firing. Then repeat.

Contact Firing: Push the button to the right. Squeeze the Trigger, then apply pressure to the Safety Contact Pin. Continue squeezing the Trigger but release pressure on the Safety Contact Pin after firing. Then repeat.

170x11mm

18GA NARROW CROWN STAPLES AND BRAD NAILS :





90.9x21.3mm

18V 2.0Ah Lithium-lon Battery

18V 2.0Ah Lithium-lon Battery

91.7x37.4mm

- 1.Remove battery when checking Contact Tip and Trigger mechanism, clearing jams and servicing.
- WARNING
- 2.Always wear safety goggles when operating this tool. A full face shield
- 3.To avoid accidental firing, keep fingers away from the trigger when not intending to fire
- 4.Read the Instruction Manual carefully to understand the different firing modes and to
- 5.Never remove the trigger or tamper with this tool.
- $\hbox{6.Never point the tool at yourself or others when connecting battery and/or using the too}\\$


4.2x3.7cm



75.9*42mm



91.2x36.3mm

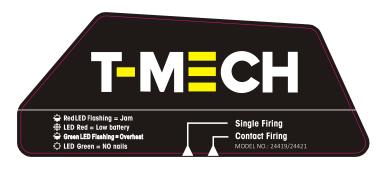

44X29MM

