

Product Name : Gas Fire Pit				
Model:				
Serial No:				
Date Code:				
Gas Type	Butane at (28-30)mbar/ Propane at 37mbar	LPG gas Mixture	LPG gas Mixture	LPG gas Mixture
Gas Category	13+ (28-30/37)	13B/P(30)	13B/P(37)	13B/P(50)
Heat Input(Hs)	13kw(946,4gh)			
Gas pressure	G30 at 28-30mbar G31 at 37mbar	G30/G31 at 30mbar	G30/G31 at 37mbar	G30/G31 at 50mbar
Destination Countries	BE, FR, IT, LU, IE, GB, GR, PT, ES, CY, CZ, LT, SK, CH, SI	LU, NL, DK, FI, SE, CY, CZ, EE, LT, MT, SK, SI, BG, IS, NO, TR, HR, RO, IT, HU	PL	DE, AT, CH, SK,
Injector diameter (Ø)	1,84mm	1,84mm	1,74mm	1,59mm

CE  
2575-21  
2575DM28154

Read the instructions before use FOR OUTDOOR USE ONLY

**Caution**

- This appliance is intended for decorative purposes.
- Accessible parts may be very hot. Keep young children away.
- This appliance must be installed in accordance with relevant regulations.
- After use turn off appliance at the cylinder valve.
- This appliance requires a hose and a regulator which are defined in the instructions.

**WARNING NOT TO BE USED FOR THE HEATING OF DOMESTIC PREMISES.**

**WARNING THE APPLIANCE SHOULD NOT BE USED IN BASEMENTS OR BELOW GROUND LEVEL.**

**WARNING THIS APPLIANCE HAS A NAKED FLAME. A SUITABLE GUARD SHOULD BE USED FOR THE PROTECTION OF YOUNG CHILDREN, THE ELDERLY AND THE INFIRM.**

**LIGHTING INSTRUCTIONS:**

1. Read operating instructions before lighting.
2. Burner Control Knob must be in "OFF" position.
3. Make sure the fuel supply is properly connected and open at the source/tank. (See instructions manual)
4. Push and hold the ignition button to create sparks.
5. While holding the ignition button, push and turn the Control Knob to the "LOW" position to light the pilot.
6. Keep the Control Knob pressed in for 15-30 seconds after ignition.
7. If ignition does not occur in 30 seconds, push and turn the Burner Control Knob to "OFF", wait 5 minutes, fan the appliance with a newspaper or magazine and repeat the lighting process.
8. If the ignition process does not light the burner, use a long match or a long butane lighter.
9. Adjust the flame to desired strenght with the Control Knob.


**CAUTION: THE GAS SUPPLY MUST BE TURNED OFF AT THE GAS SOURCE WHEN THE APPLIANCE IS NOT IN USE.**

**TURNING OFF**


1. Turn and push the control knobs clockwise to the "OFF" position.
2. Turn the cylinder valve off at the gas cylinder.

**FOR SAFE OPERATION**

1. Ensure the fireplace is not resting on the gas hose and there are no crimps in the hose.
2. Ensure the gas cylinder valve, thermocouple, burner ignition area and burner openings are clear of any debris.

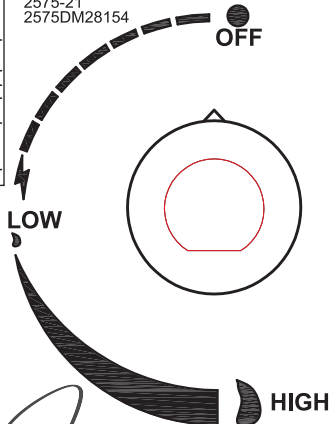

*Jardi*



**IGNITER-PUSH**