

Instruction Manual






Wire Shelving

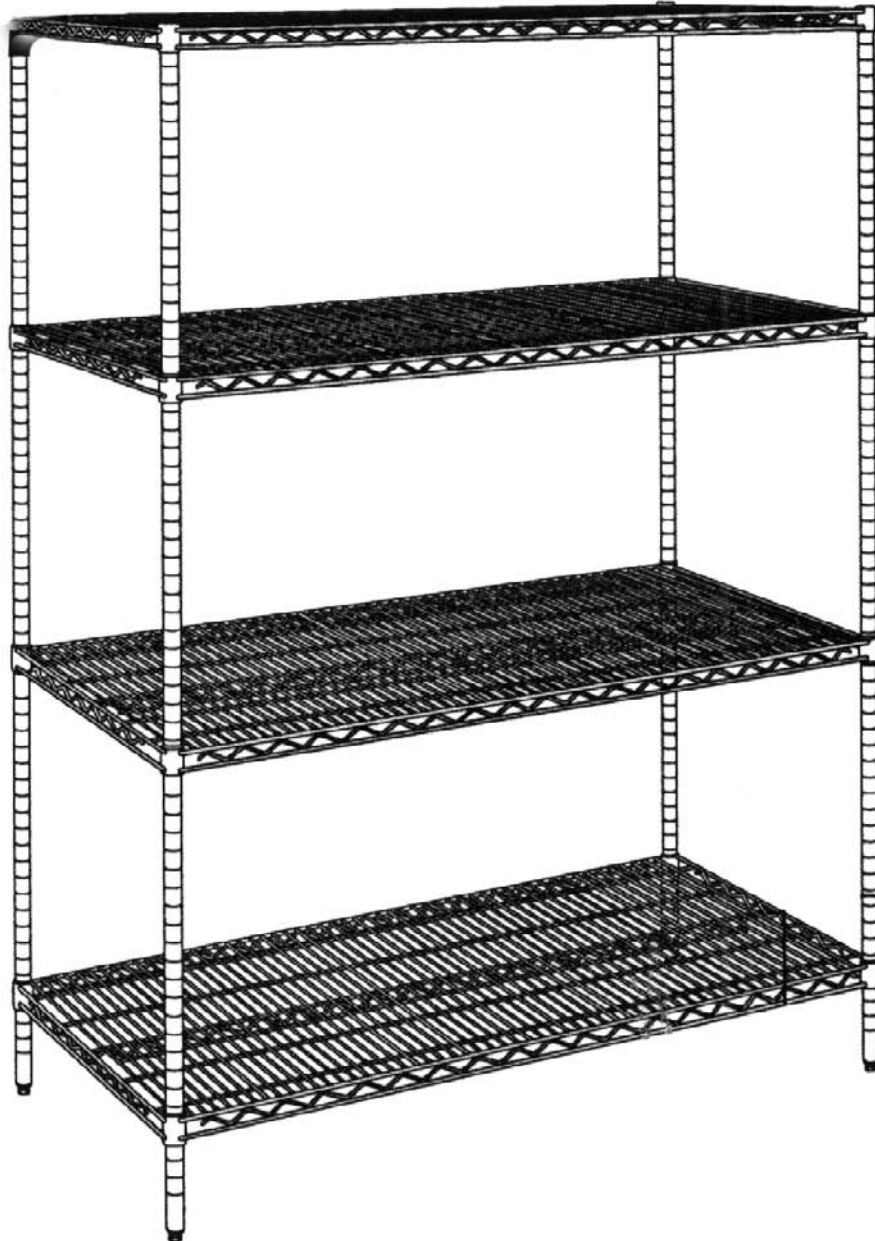


KLETON

Shelving Assembly

Note: When assembling the unit never strike the shelf directly with a hammer or other object when seating the shelf. Instead use a rubber mallet or a flat piece of wood to protect the finish before striking.

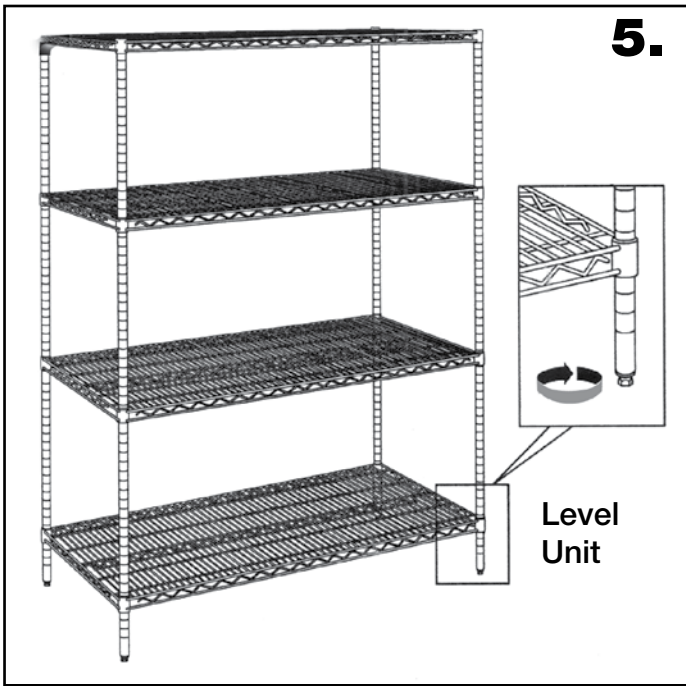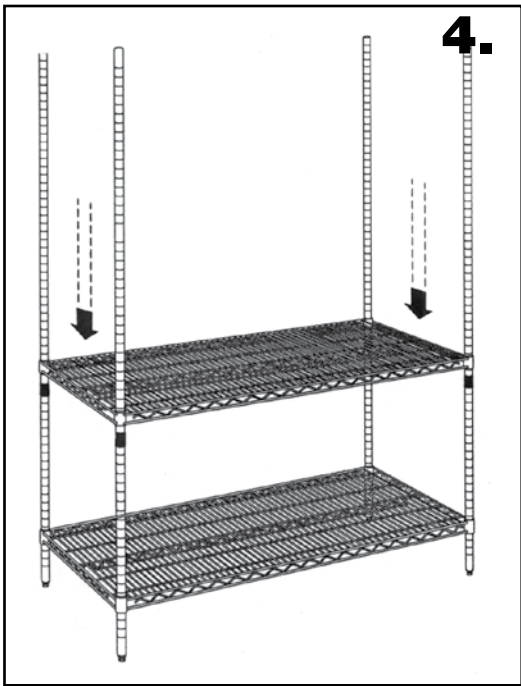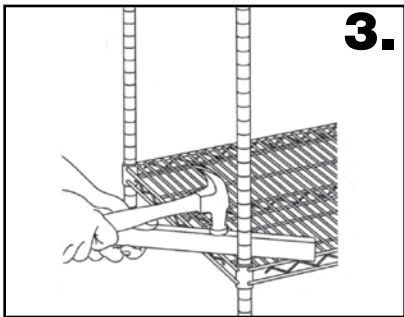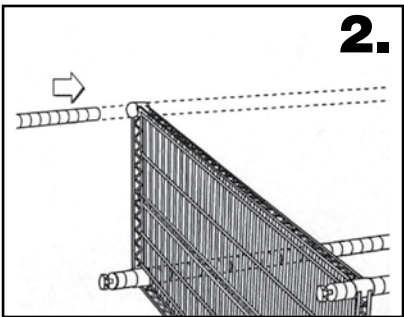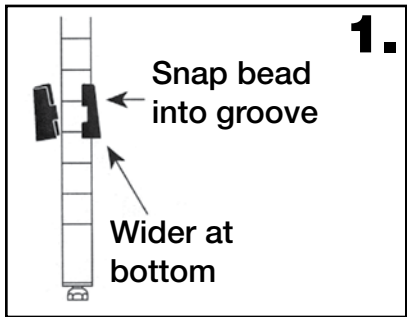


"S" Hooks

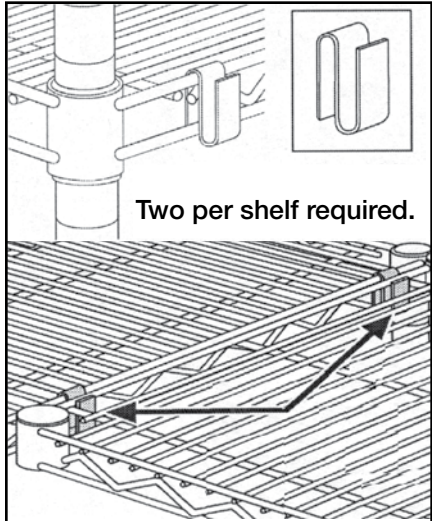

Mobile Unit

- Stem Caster**
 1. Assemble post, and caster
 2. Then assemble unit

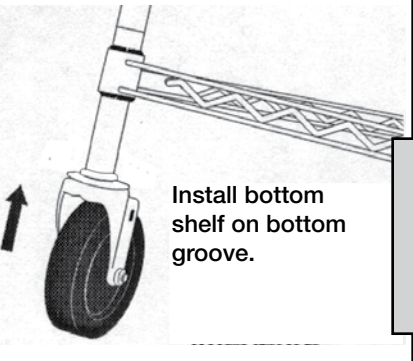

Info

Posts
 Posts are grooved at 1" (25 mm) increments and numbered at 2" (50 mm) increments. Posts are double-grooved every 8" (203 mm) for easy shelf positioning.

WARNING
 All Mobile Units: Weight capacity is limited to three times (3X) the caster load rating 1000 lbs. (454kg), whichever is less. **"S" hooks must NOT be used in mobile applications.**



For Best Performance . . .

- Units over 50" (1270 mm) high should be assembled with at least three shelves, and preferably four or more
- Place shelving on solid and level floors
- Level the unit by adjusting the leveling feet
- Install bottom shelf as low as possible. NSF requires that the lowest shelf be at least 6" (152 mm) above the floor
- **For mobile units:** lubricate the casters regularly and replace worn casters immediately

WARNING

- Do not stand or climb on shelving
- Place heavy objects on lowest shelf
- Distribute weight as evenly as possible
- Do not drop heavy objects on shelves or subject units to shock such as forklifts or dollies
- Move mobile units along long axis only
- Strictly follow weight capacity guidelines below
- Never exceed 2000 lbs. (900 kg) on any Stationary Storage System or 1000 lbs. (450 kg) on any Mobile Storage System

Weight Capacity (Evenly Distributed)

Length of Shelf

24" to 48" = 800 lbs.

610 mm to 1220 mm = 363 kg

54" to 72" = 600 lbs.

1372 mm to 1828 mm = 272 kg

Stability Guidelines/Allowable Heights

Stationary Units (Free-standing without footplates or wall brackets)	
Shelf Depth	Maximum Allowable Post Height
18" (457 mm)	86" (2184 mm)
24" (610 mm)	86" (2184 mm)
Mobile Units with Stem Casters	
Shelf Depth	Maximum Allowable Post Height
18" (457 mm)	74" (1880 mm)
24" (610 mm)	86" (2184 mm)
Mobile Units with Dolly Platforms	
Shelf/Dolly Depth	Maximum Allowable Post Height
	5" (127 mm) Casters
18" (457 mm)	63" (1600 mm)
24" (610 mm)	86" (2184 mm)

Failure to follow these instructions could result in personal injury or property damage.

Information and specifications are subject to change without notice. Please confirm at time of order.